


## P3 DELUXE mono - IP65 18W 4000k 60cm

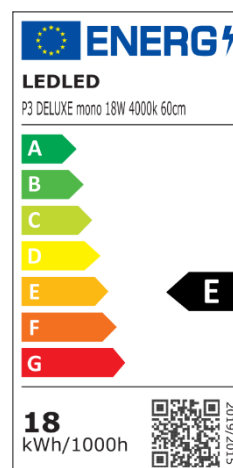

### Productspecificaties

|                   |                      |
|-------------------|----------------------|
| Artikel nummer    | <b>LL-P3-6-18-MO</b> |
| Wattage           | <b>18W</b>           |
| IP-Waarde         | <b>IP 65</b>         |
| Input             | <b>AC230V</b>        |
| Kleur temperatuur | <b>4000k</b>         |
| Bundel            | <b>120 graden</b>    |
| Lumen             | <b>2358lm</b>        |
| Afmeting          | <b>600x91x78mm</b>   |
| Gatmaat           | <b>N.V.T.</b>        |

### Optioneel:

|                                              |                   |
|----------------------------------------------|-------------------|
| Artikel nummer                               | <b>LL-NU-P-1h</b> |
| <b>Nood Unit T.B.V. Bovenstaand Armatuur</b> |                   |

### Technische specificaties

|                    |                            |
|--------------------|----------------------------|
| CRI                | <b>80</b>                  |
| Macadam            | <b>&lt;6 SDCM</b>          |
| Efficiency         | <b>131lm/w</b>             |
| Levensduurcriteria | <b>&gt;50.000h L90 B50</b> |
| Chip               | <b>SMD 2835</b>            |
| Driver             | <b>Osram driver</b>        |
| Diffuser           | <b>IK08</b>                |
| TA                 | <b>-20C TA/max</b>         |
| Powerfactor        | <b>0,9</b>                 |
| UGR                | <b>22</b>                  |
| Certificaten       | <b>CE/LSOH/ENEC</b>        |