P2 INDOOR armatuur 40W

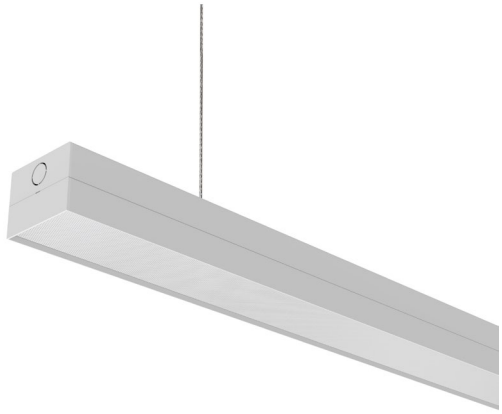

Productspecificaties

Artikel nummer	**LL-P2-15-40-IN**
Wattage	**40W**
IP-Waarde	**IP 20**
Input	**AC230V**
Kleur temperatuur	**Tri-color (3000k-4000k-5000k)**
Bundel	**120 graden**
Lumen	**4400lm**
Afmeting	**1500x80x63,5mm**
Gatmaat	**N.V.T.**

Technische specificaties

CRI	**80**
Macadam	**<3 SDCM**
Efficiency	**110lm/w**
Product life minimum	**50.000h L80 B10/70.000h L70 B10**
Chip	**SMD 2835**
Driver	**Boke Flicker Free**
Diffuser	**IK02**
TA	**-20C TA/max**
Powerfactor	**0,95**
UGR	**19**
Certificaten	**CE/LSOH/ENEC**

LEDLED B.V.
Hoge Bergen 14
4704 RH Roosendaal
Tel. 085-3013810
info@ledled.nl - www.ledled.nl

DIP Switch Setting 拨码设置

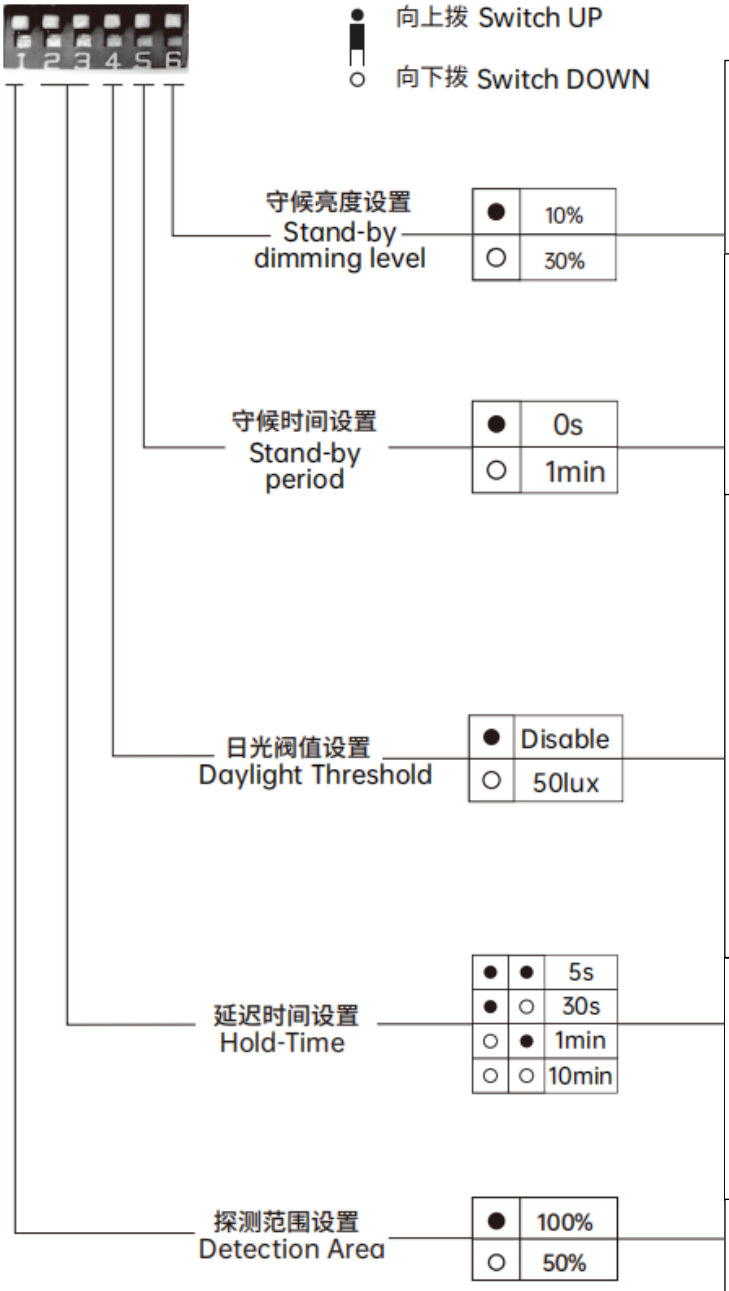

守候亮度设置 Stand-by dimming level	The definition of low output in the standby period. De “standby dimming stand” van 10% of 30%
守候时间设置 Stand-by period	The period of light keeping low output before it’s completely switched off. De tijd dat de “standby dimming stand” is ingeschakeld voordat de lamp volledig uitschakelt.
日光阀值设置 Daylight Threshold	Definition of the ambient brightness; only when the ambient brightness is lower than the preset specific lux amount, the sensor will work; when it’s preset as “disable, the sensor works every time it detects motion regardless of the ambient brightness. Daglicht sensor werkt en is ingeschakeld wanneer het aantal lux in de kamer onder de 50 lux komt. De bewegingssensor werkt ook op dat moment. Als de daglichtsensor is uitgeschakeld dan werkt alleen bewegingssensor.
延迟时间设置 Hold-Time	The period of light keeping 100% brightness after moving objects leave the detection area. De tijd dat de lamp 100% aan gaat na beweging in de kamer.
探测范围设置 Detection Area	In this area, movement will be detected and able to trigger the sensor. 100% detection area is also know as the strong sensitivity. In de mate hoe sterk de lamp reageert op beweging in de kamer. Aan te raden om dit op 50% in te stellen.

LEDLED B.V.
Hoge Bergen 14
4704 RH Roosendaal
Tel. 085-3013810
info@ledled.nl - www.ledled.nl